
Technical Specification UTS 1000

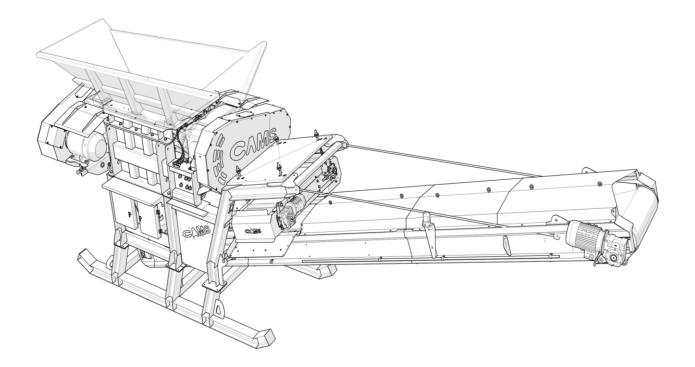

ADVANTAGES

High capacity up to 120 t/h

Low air pollution

Low noise pollution

No vibrations

Low wear costs and maintenance

Changing all the cutting tools on the shafts only takes a few hours.

Hydraulic setting adjustment

All specifications subject to change without prior notice.



FEATURES

<u>Shredder</u>

 Type of Shredder Feed opening Max feed size Electric motor Rotors speed Max Capacity Weight V belts and pulleys Chuteworks 	FTR1000 mm 1.000x900 mm 600x500x400 kW 30 (15+15) rpm 10 t/h 120 Kg 7.500			
Feeding Hopper				
 Capacity : Length : Width : Main Conveyor TNL 800x8,00 m Length Belt width Belt speed Capacity Electric moto-reducer Height discharge 	m ³ 2,85 m 3,00 m 2,00 m 8,00 mm 800 m/s 1,4 t/h 180 kW 5,5 m 3,00			
Overband Magnet				
 Conveyor Length Belt width Magnet Power Electric moto-reducer 	m 1,66 mm 650 mm 800x600 420 Gauss at 200 mm kW 1,5			

Electrical control panel

- Electrical cabinet with interlocking and cabling to motors
- PLC controls
- Incoming cables to control cabinet Excluded
- <u>Volt 400 50 Hz</u>

<u>Chassis</u>

Heavy duty fabricated I section of welded construction


All specifications subject to change without prior notice.



Transport Dimension:

•	Width	m	2,50
•	Height	m	3,00
•	Length	m	8,70
•	Weight	Kg	13.000

Work Dimension

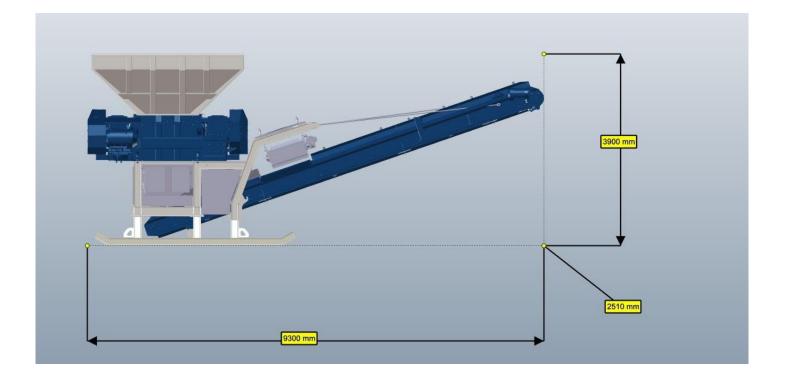

All specifications subject to change without prior notice.



CAMS s.r.l. VIA Giulio Golini, 301 40024- Castel San Pietro Terme (BO)- Tel. 0516946611 Cod. Fisc. e Part. IVA 02146431206- R.E.A. n° 416377- Cap. Soc. 93.000 euro Int. Vers.