UTM1500-3



Technical Specification

All the specifications reported in this document may be subject to change without prior notice.






Features:

Width(transport): m 2,50
Length (transport): m 10,55
Height (transport): m 3.00
Shredder Type: FTR 1500
Weight: Kg 22.500

Genset: Diesel IVECO N67 212 kW at 1500 rpm Alternator210 KVA

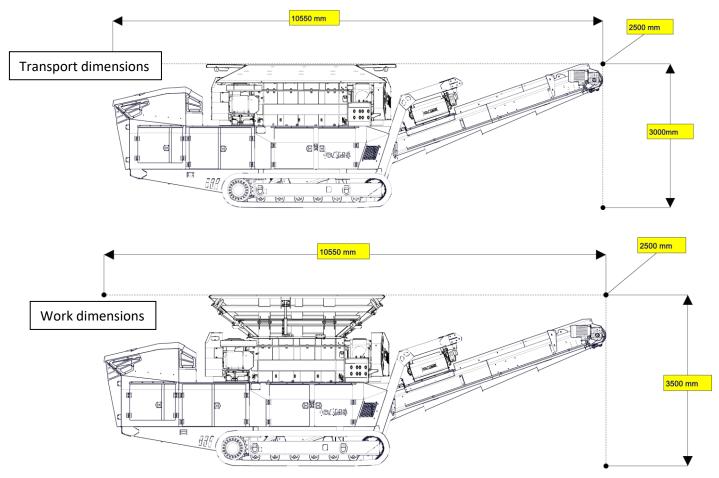

Advantages:

- High productivity up to 180 t / h
- Quick installation
- · Remote control with cable.
- Single genset in order to minimize fuel consumption
- Engine Electrical, to optimize performance in order to reduce fuel consumption
- Engine Electrical, to ensure a consistent performance of screening regardless of the environmental conditions of work.
- · Optional radio control wireless.
- Don't produce noise and air pollution
- Possibility to distribute electricity to the jobsite

All the specifications reported in this document may be subject to change without prior notice.







Feeding Hopper:

Length: m 3.50 Width m 2.00 Capacity: m³ 3.80


Hydraulic Feed hopper extensions

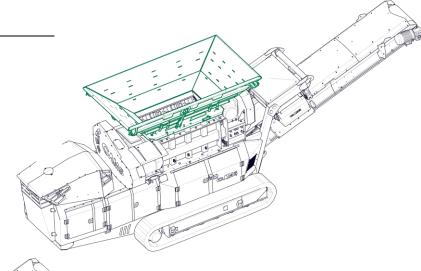



Shredder:

Type of Shredder: FTR 1500
Feed opening: mm 1500x900
Rotor Knives: pcs 30
Rotor Knives width: mm 50
Electric motor: kW 44 (22+22)
Rotors speed: rpm 10

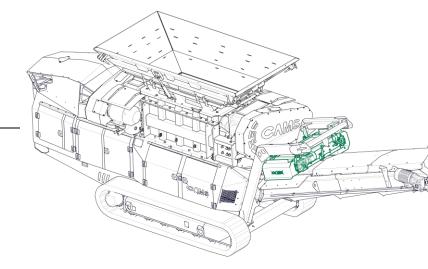

Overbelt Magnet:


Belt width: mm 650 Conveyor length: mm 1.660 Electric moto-reducer kW 1.5

Power: 420 Gauss at 200 mm

Main Conveyor:

Belt width: mm 800 Electric moto-reducer: kW 5.5 Stockpile Height: m 3.00

Dust reduction

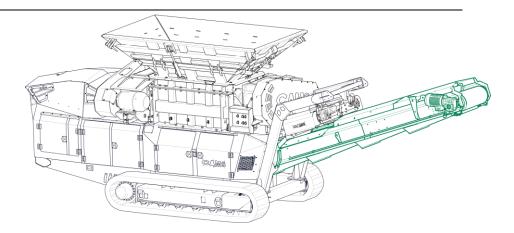

All the specifications reported in this document may be subject to change without prior notice.






Track Data:


Track length: mm 3790
Track width: mm 400

Hydraulic Motor:bosch Rexroth 28/60 cc

Gearbox: Trasmital Speed: 0,3÷0,6 Km/h

Control: Remote handset - Dual Speed

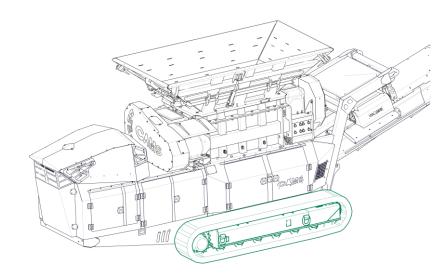

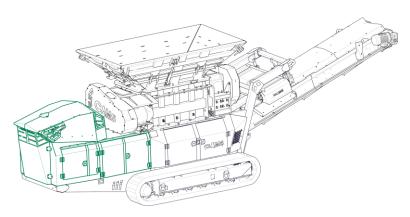

Genset:

Diesel Engine: IVECO N67 212 kW at 1500 rpm

Alternator: Marelli 300 KVA

Tank capacities:

Hydraulic: I 85 Fuel: I 170

 $All the specifications \ reported \ in \ this \ document \ may \ be \ subject \ to \ change \ without \ prior \ notice.$



UTM 1500-3 - AT WORK



UTM 1500-3 - SHIPMENT





